

OFF ROAD Construction F36

F36
63 kW (82 HP) @ 2300 rpm
Stage V - Tier 4 Final

SPECIFICATIONS


No. of cylinders / valves	4L /4
Turbocharger	WG
Injection System	COMMON RAIL 1800 bar
Displacement	liters 3.6
Bore x Stroke	millimeters 102 x 110
Max power	kW (HP) @ rpm 63 (82) @ 2300
Max Torque	Nm @ rpm 354 @ 1500
ATS	HI-eSCR2
Certification	Stage V - Tier 4 Final

WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	714 x 601 x 852
Dry Weight	Kg	320

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

POWER & TORQUE

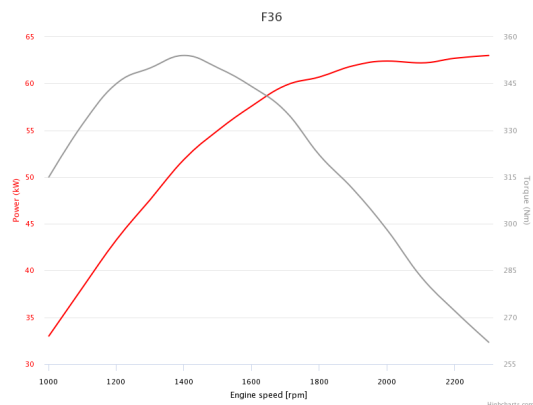

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

CONSTRUCTION

Do you want to know more?

LEGEND

Air Handling

TCA (Turbocharged with aftercooler)
TC (Turbocharged)
NA (Naturally Aspirated)

Turbocharger

WG (Wastegate)
VGT (Variable Geometry Turbocharger)
TST (Twin Stage Turbocharger)

Exhaust System

EGR (Exhaust Gas Recirculation)
SCR (Selective Catalytic Reduction)
DOC (Diesel Oxidation Catalyst)
DPF (Diesel Particulate Filter)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

